

# EZ-Y22409IR

## EZ-Y22409IRH

### EZ-Y22409IREF

420TVL WEATHERPROOF VARIFOCAL IR BULLET CAMERA

650TVL WEATHERPROOF VARIFOCAL IR BULLET CAMERA

700TVL WEATHERPROOF VARIFOCAL IR BULLET CAMERA

## FEATURES

*Auto Focus, Focus-Free  
No Screw-Driver Needed*


- 1/3" Sony High Image CCD
- Dual Glasses to Avoid IR Reflection
- Day/Night: Built-in 42PCS IR LED
- 40M IR Distance
- Weatherproof IP 66
- 4-9mm Electronic Varifocal Zoom Lens
- External Zoom-In/Out Press Button
- Electronic Focal-Adjustment via Cable and RS-485 for Easy Installation
- Cable-Hidden Bracket with Multi-Angle View
- Smart IR to Avoid Over Brightness on Close Range Objects



## SPECIFICATION

MODEL	EZ-Y22409IREF	EZ-Y22409IRH	EZ-Y22409IR
Image Sensor	1/3" Sony EXview HAD CCD II	1/3" Sony High Image CCD	1/3" Sony High Image CCD
Total Number of Pixels	NTSC: 976(H) X 494(V) PAL: 976(H) X 582(V)	NTSC: 811(H) X 508(V) PAL: 795(H) X 596(V)	NTSC: 512(H) X 492(V) PAL: 500(H) X 582(V)
Resolution	700 TV Lines	650TV Lines	420 TV Lines
Lens	4-9mm Electronic Varifocal Zoom lens, Focus-Free		
BNC Video Output	1.0 Vp-p. 75 ohm		
Gamma	0.45		
S/N Ratio	>48dB		
Min. Illumination	0.01LUX/F1.2(0 LUX IR On)	0.4LUX/F1.4(0 LUX IR On)	0.4LUX/F1.4(0 LUX IR On)
Sync. Mode	Internal Sync.		
Scanning System	2:1 Interlace		
Shutter Control	NTSC:1/60~1/100,000sec PAL:1/50~1/100,000sec		
Shutter Speed	Auto		
Back Light Compensation	Auto		
Gain Control	Auto		
White Balance	Auto		
Day/Night	Built-in 42PCS IR LED		
IR Distance	40 Meters		
Power	12V DC		
Dimension	74mm(Ø) X 124mm(L)		
Weight	0.9 kg		

## DIMENSION

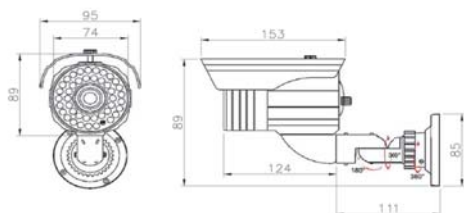

Unit : mm