

EZ-Y252812IR

EZ-Y252812IRH

EZ-Y252812IREF

420TVL WEATHERPROOF VARIFOCAL IR BULLET CAMERA

650TVL WEATHERPROOF VARIFOCAL IR BULLET CAMERA

700TVL WEATHERPROOF VARIFOCAL IR BULLET CAMERA

FEATURES


- 1/3" Sony High Image CCD
- Dual Glasses to Avoid IR Reflection
- Day/Night: Built-in 42PCS IR LED
- 40M IR Distance
- 3-Axis Cable-Hidden Bracket
- Weatherproof IP 66
- Detachable Plate for Easy Installation
- External Zoom/Focus for Easy Adjustment
- Metal Housing to Withstand Years of Use
- Smart IR to Avoid Over Brightness on Close Range Objects



SPECIFICATION

MODEL	EZ-Y252812IREF	EZ-Y252812IRH	EZ-Y252812IR
Image Sensor	1/3" Sony EXview HAD CCD II	1/3" Sony High Image CCD	1/3" Sony High Image CCD
Total Number of Pixels	NTSC: 976(H) X 494(V) PAL: 976(H) X 582(V)	NTSC: 811(H) X 508(V) PAL: 795(H) X 596(V)	NTSC: 512(H) X 492(V) PAL: 500(H) X 582(V)
Resolution	700 TV Lines	650TV Lines	420 TV Lines
Lens	2.8-12mm Varifocal Lens		
BNC Video Output	1.0 Vp-p. 75 ohm		
Gamma	0.45		
S/N Ratio	>48dB		
Min. Illumination	0.01LUX/F1.2(0 LUX IR On)	0.4LUX/F1.4(0 LUX IR On)	0.4LUX/F1.4(0 LUX IR On)
Sync. Mode	Internal Sync.		
Scanning System	2:1 Interlace		
Shutter Control	NTSC: 1/60~1/100,000sec PAL: 1/50~1/100,000sec		
Shutter Speed	Auto		
Back Light Compensation	Auto		
Gain Control	Auto		
White Balance	Auto		
Day/Night	Built-in 42PCS IR LED		
IR Distance	40 Meters		
Power	12V DC		
Dimension	64mm(Ø) X 154mm(L)		
Weight	1.1 kg		

DIMENSION

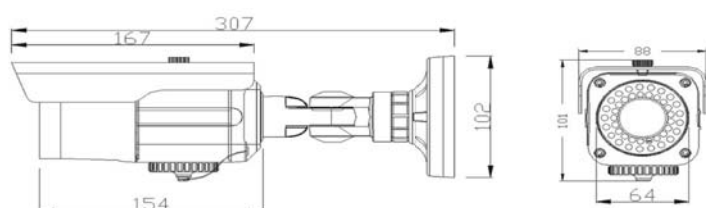

Unit : mm