

EZ-IP722812IR130

EZ-IP722812IR200

HD WEATHERPROOF VARIFOCAL IR BULLET IP CAMERA, 960P, 1.3 MEGAPIXEL

HD WEATHERPROOF VARIFOCAL IR BULLET IP CAMERA, 1080P, 2.0 MEGAPIXEL

FEATURES

- ONVIF 2.3
- PoE (Power over Ethernet): Optional
- HD 1.3 MegaPixel (960P)/ HD 2.0 MegaPixel (1080P)
- Triple Stream: Main Stream, Sub Stream, Mobile Stream
- Day/ Night: Built-in 42pcs IR LED
- 40M IR Distance
- Weatherproof IP66
- Metal Housing to Withstand Years of Use
- IR-Cut Filter: No Color Difference at Day Time;
Brighter Image at Night Time



SPECIFICATION

MODEL	EZ-IP722812IR130	EZ-IP722812IR200
Video Compression	H.264	
Image Sensor	1/4" High Image CMOS Sensor	1/3" High Image CMOS Sensor
Total Number of Pixels	1280(H) X 960(V)	1920(H) X 1080(V)
Resolution	1.3 MegaPixel	2.0 MegaPixel
Frame Rate	30fps at 1280 x 960 (NTSC) 25fps at 1280 x 960 (PAL)	30fps at 1920 x 1080 (NTSC) 25fps at 1920 x 1080 (PAL)
Triple Stream	Main Stream: 1280 X 960 (960P) Sub Stream: 640 X 480 (VGA) Mobile Stream: 320 X 240 (QVGA)	Main Stream: 1920 X 1080 (1080P) Sub Stream: 640 X 480 (VGA) Mobile Stream: 320 X 240 (QVGA)
Lens	2.8-12mm Varifocal Lens	
Min. Illumination	0.05LUX/F1.2 (0 LUX IR On)	
Shutter Control	NTSC: 1/30 ~ 1/20,000sec PAL: 1/25 ~ 1/20,000sec	
Day/Night	Built-in 42PCS IR LED	
IR Distance	40 Meters	
Audio	YES (Optional)	
Network Protocol	TCP/IP, UDP, RTP/RTCP, RTSP, HTTP, SMTP, DNS, DDNS, DHCP, FTP, NTP, PPPoE, UPNP (SNMP, HTTPS, SIP Optional)	
Ethernet	1 x RJ45 10M/ 100M Ethernet Interface	
Power	12V DC/ PoE	
Operating Temperature	-10°C ~ 60°C (-14°F ~ 140°F)	
Operating Humidity	90% or Less (Non-Condensing)	
Dimension	269mm(L) X 74mm(W) X 83mm(H)	
Weight	0.64 kg	

DIMENSION

EZ-IP7136IR130

EZ-IP7136IR200

HD WEATHERPROOF IR BULLET IP CAMERA, 960P, 1.3 MEGAPIXEL
 HD WEATHERPROOF IR BULLET IP CAMERA, 1080P, 2.0 MEGAPIXEL

FEATURES


- ONVIF 2.3
- PoE (Power over Ethernet): Optional
- HD 1.3 MegaPixel (960P)/ HD 2.0 MegaPixel (1080P)
- Triple Stream: Main Stream, Sub Stream, Mobile Stream
- Day/ Night: Built-in 30pcs IR LED
- 25M IR Distance
- Weatherproof IP66
- Metal Housing to Withstand Years of Use
- IR-Cut Filter: No Color Difference at Day Time;
Brighter Image at Night Time



SPECIFICATION

MODEL	EZ-IP7136IR130	EZ-IP7236IR200
Video Compression	H.264	
Image Sensor	1/4" High Image CMOS Sensor	1/3" High Image CMOS Sensor
Total Number of Pixels	1280(H) X 960(V)	1920(H) X 1080(V)
Resolution	1.3 MegaPixel	2.0 MegaPixel
Frame Rate	30fps at 1280 x 960 (NTSC) 25fps at 1280 x 960 (PAL)	30fps at 1920 x 1080 (NTSC) 25fps at 1920 x 1080 (PAL)
Triple Stream	Main Stream: 1280 X 960 (960P) Sub Stream: 640 X 480 (VGA) Mobile Stream: 320 X 240 (QVGA)	Main Stream: 1920 X 1080 (1080P) Sub Stream: 640 X 480 (VGA) Mobile Stream: 320 X 240 (QVGA)
Lens	3.6mm Lens	
Min. Illumination	0.05LUX/F1.2 (0 LUX IR On)	
Shutter Control	NTSC: 1/30 ~ 1/20,000sec PAL: 1/25 ~ 1/20,000sec	
Day/Night	Built-in 30PCS IR LED	
IR Distance	25 Meters	
Audio	YES (Optional)	
Network Protocol	TCP/IP, UDP, RTP/RTCP, RTSP, HTTP, SMTP, DNS, DDNS, DHCP, FTP, NTP, PPPoE, UPNP (SNMP, HTTPS, SIP Optional)	
Ethernet	1 x RJ45 10M/ 100M Ethernet Interface	
Power	12V DC/ PoE	
Operating Temperature	-10°C ~ 60°C (-14°F ~ 140°F)	
Operating Humidity	90% or Less (Non-Condensing)	
Dimension	152mm(L) X 66mm(W) X 69mm(H)	
Weight	0.32 kg	

DIMENSION

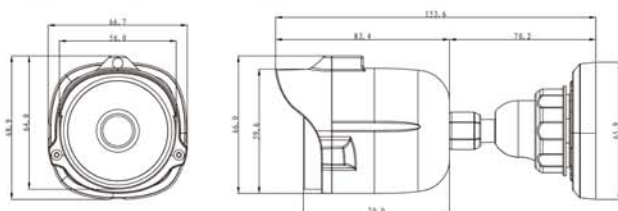

Unit : mm

EZ-IP6136IR130

EZ-IP6236IR200

HD WEATHERPROOF IR DOME IP CAMERA, 960P, 1.3 MEGAPIXEL

HD WEATHERPROOF IR DOME IP CAMERA, 1080P, 2.0 MEGAPIXEL

FEATURES

- ONVIF 2.3
- PoE (Power over Ethernet): Optional
- HD 1.3 MegaPixel (960P)/ HD 2.0 MegaPixel (1080P)
- Triple Stream: Main Stream, Sub Stream, Mobile Stream
- Day/ Night: Built-in 30pcs/ 36pcs IR LED
- 25M/ 30M IR Distance
- Weatherproof IP66
- Metal Housing to Withstand Years of Use
- IR-Cut Filter: No Color Difference at Day Time;
Brighter Image at Night Time



SPECIFICATION

MODEL	EZ-IP6136IR130	EZ-IP6236IR200
Video Compression	H.264	
Image Sensor	1/4" High Image CMOS Sensor	1/3" High Image CMOS Sensor
Total Number of Pixels	1280(H) X 960(V)	1920(H) X 1080(V)
Resolution	1.3 MegaPixel	2.0 MegaPixel
Frame Rate	30fps at 1280 x 960 (NTSC) 25fps at 1280 x 960 (PAL)	30fps at 1920 x 1080 (NTSC) 25fps at 1920 x 1080 (PAL)
Triple Stream	Main Stream: 1280 X 960 (960P) Sub Stream: 640 X 480 (VGA) Mobile Stream: 320 X 240 (QVGA)	Main Stream: 1920 X 1080 (1080P) Sub Stream: 640 X 480 (VGA) Mobile Stream: 320 X 240 (QVGA)
Lens	3.6mm Lens	
Min. Illumination	0.05LUX/F1.2 (0 LUX IR On)	
Shutter Control	NTSC: 1/30 ~ 1/20,000sec PAL: 1/25 ~ 1/20,000sec	
Day/Night	Built-in 30PCS IR LED	Built-in 36PCS IR LED
IR Distance	25 Meters	30 Meters
Audio	YES (Optional)	
Network Protocol	TCP/IP, UDP, RTP/RTCP, RTSP, HTTP, SMTP, DNS, DDNS, DHCP, FTP, NTP, PPPoE, UPNP (SNMP, HTTPS, SIP Optional)	
Ethernet	1 x RJ45 10M/ 100M Ethernet Interface	
Power	12V DC/ PoE	
Operating Temperature	-10°C ~ 60°C (-14°F ~ 140°F)	
Operating Humidity	90% or Less (Non-Condensing)	
Dimension	106mm(ø) X 69mm(H)	135.5mm(ø) X 86mm(H)
Weight	0.34 kg	0.55 kg

DIMENSION